



Datasheet NHD-830-7014



High Performance Global RAIN RFID Inlay for Enhanced Item Performance



Hana's comprehensive ARC-certified RAIN RFID (UHF) inlay program is tailored for use in applications across various industries, such as apparel/retail, agriculture and food production, and supply chain/logistics.

Offered in a wide range of delivery formats, our inlays are ideal for numerous applications demanding exceptional performance.

Applications

- Apparel
- Beauty & Personal Care
- Shipment Verification
- Self-service checkout

Industry Segments

- Retail
- Healthcare
- Supply Chain & Logistics
- Automotive

Overview

Antenna Size	70 x 14 mm (2.756 x 0.551")
IC	Impinj M830
EPC Memory	128-bit
User Memory	-
TID Memory	96-bit
Frequency Band	UHF 860 - 960 MHz
Protocol	EPC Global Gen 2v2 ISO/IEC 18000-63 Type C
Delivery Formats	Dry Inlay, Wide Web, Wet White Paperface


Quality & Certification

ARC Certified	Yes, Spec F, I, I/F, L, O, Q, R, W5, W6, Y2
Inspection	100% Tested
RoHS	EU Directive 211/65/EU and 2015/863 compliant


Technical Overview

	Dry Inlay	Dry Wide Web	Wet White Paperface
Product Code	TX7014BM830	TX7014AM830	TX7014AM830-WW
Antenna/tag Size	70 x 14 mm 2.756 x 0.551"	70 x 14 mm 2.756 x 0.551"	73 x 17 mm 2.875 x 0.672"
Web With	73,5 mm 2.894"	85 mm 3.344"	79,375 mm 3.125"
Pitch	22,225 mm 0.875"	22,225 mm 0.875"	22,225 mm 0.875"
Inlays per Roll	40.000	40.000	13.000
Antenna Material	Aluminium	Aluminium	Aluminium
Inlay Substrate	50um PETm 9UM AI	50um PETm 9UM AI	50um PETm 9UM AI
Facesheet Properties	N/a	N/a	40# Thermal Transfer Paper
Adhesive Properties	N/a	N/a	Acrylic Permanent
Operating Temperatures	40 to 85°C -40 to 185°F	40 to 85°C -40 to 185°F	40 to 85°C -40 to 185°F
Adhesive Application	N/a	N/a	-4°C 25°F
Adhesive Service Temperature (range)	N/a	N/a	-59 to 93°C -75 to 200°F

Read Range

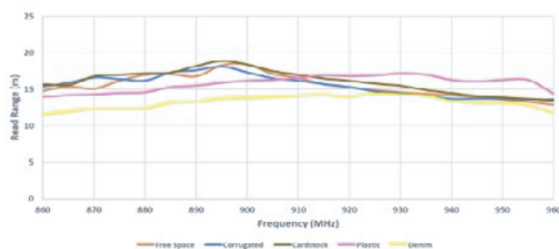

Orientation Sensitivity

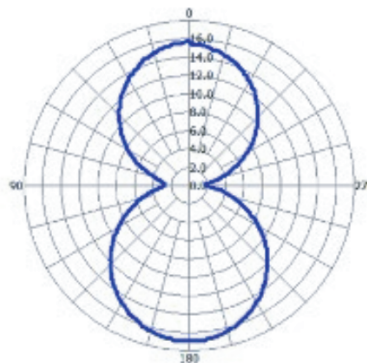

©2025 Hana Technologies, Inc. (Hana) All rights reserved. Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

Warranty: Please refer to Hana's UHF Labels standard terms and conditions. RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics / RFID to keep environmental impact and static charge to a minimum.

Applications: This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the requirements. Hana Technologies, Inc. does not represent that this product is fit for any particular purpose or use. The information contained herein is believed to be reliable but Hana Technologies, Inc. makes no representation concerning the accuracy or correctness of the data.

NAM VIET GROUP JSC

Head Office

2/3 Road 426, Hamlet 1, Cu Chi Commune, Ho Chi Minh City, Vietnam
 +84 28 62955721-31 - **Hotline:** 0928.706.868
 info@namvietgroups.com
 namvietgroups.com

Representative Office

34 Binh Than 3 Street, Dai Duong Area, Dai Phuc Ward, Bac Ninh City, Bac Ninh Province, Vietnam
 0943 986 610 - 0947 834 866
 info@namvietgroups.com
 namvietgroups.com

Cambodia Branch: NAVI LABEL SOLUTIONS CO.,LTD

#B30 at Borey Kham Panha, St.105K, Vimean Trong Village, Sangkat Kraing Thnong, Khan Sen Sok, Phnom Penh, Cambodia
 (+855) 713555671
 nguyen.tran@navilabelsolutions.com
 navilabelsolutions.com